

**MITSUBISHI ELECTRIC  
HYDRONICS & IT COOLING SYSTEMS S.p.A.**

IT COOLING

CHILLERS

**NR<sup>2</sup>Z** G02 // G06

AIR COOLED CHILLERS FOR  
OUTDOOR INSTALLATION,  
FROM 167 TO 921 kW



# NR<sup>2</sup>Z



## QUIETER. GREENER. COOLER.

**Air cooled chillers with scroll compressors and low GWP refrigerant.  
From 167 to 921 kW.**

NR2-G02-Z and NR2-G06-Z are air cooled chillers with scroll compressors designed for delivering the best efficiencies in modern IT infrastructures.

Available with either R410A refrigerant or the low GWP R454B, the new range spans from units with four to eight compressors in a multi-circuit configuration.

All the main hydraulic and mechanical components are integrated inside the unit, providing the ideal plug & play solution for HVAC plants.


The complete range is Eurovent certified and all the sizes are completely ErP2021 compliant.



### IT COOLING APPLICATIONS

- ✓ Data centers
- ✓ Server Rooms
- ✓ Technological hubs
- ✓ Telecommunication installation
- ✓ Laboratories
- ✓ Technical rooms

## PREMIUM EFFICIENCIES IN COOLING

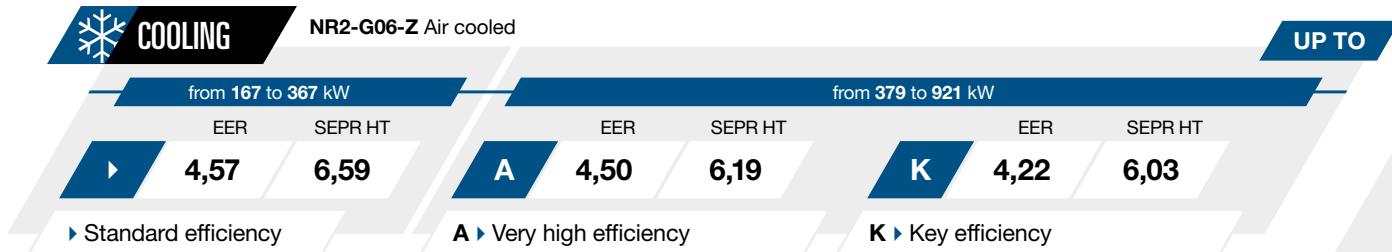

EER: 28/20°C, air 35°C (EN14511 values)  
SEPR HT: Regulation (EU) N. 2016/2281


### 3 ACOUSTIC VERSIONS

<b>Standard</b>	Low sound power levels already in the standard version.	
<b>Acoustical Enclosure</b>	Additional compressor enclosures with sound-absorbing material, for even lower sound power levels.	-2 dB(A)
<b>NR Kit</b>	The highest level of noise reduction. No compromises in efficiency!	up to -9 dB(A)

### HEAT RECOVERY CONFIGURATIONS

<b>Standard unit</b>	Unit without heat recovery.	-
<b>Partial heat recovery</b>	A desuperheater on the compressor discharge line recovers approximately 20% of the unit's capacity.	60°C
	Suitable for DHW production or other secondary uses, such as the integration of an existing boiler.	

## NEW GENERATION GREEN REFRIGERANT

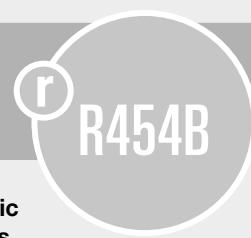

Fully committed to support the creation of a greener tomorrow, Mitsubishi Electric Hydronics & IT Cooling Systems presents the G06 series, chillers and heat pumps with reduced environmental impact.

Thanks to the new generation refrigerant R454B, the environmental impact of NR2-G06-Z is greatly reduced. Combining reduced refrigerant charge with a low GWP refrigerant, these units boast the lowest amount of CO<sub>2</sub>eq in the scroll unit market, thus resulting as the perfect choice for any new forward looking installation.

### R454B REFRIGERANT

High density, low **GWP refrigerant**. Its physical properties are **similar to R410A**, so the same type of equipment / components can be used.

#### REDUCED ENVIRONMENTAL IMPACT

- ▶ Low GWP, only 467
- ▶ Reduced refrigerant charge (-10% vs R410A)

#### RELIABILITY


- ▶ Use of **well-known components**
- ▶ Refrigerant circuit **reliability** is maintained

#### PERFORMANCE & ENVELOPE

- ▶ Same operating limits of R410A both in **cooling** and **heating**
- ▶ Higher efficiency (full load +3,5%, seasonal +2% vs R410A)

**GWP: 467**

-76% vs R410A  
-31% vs R32

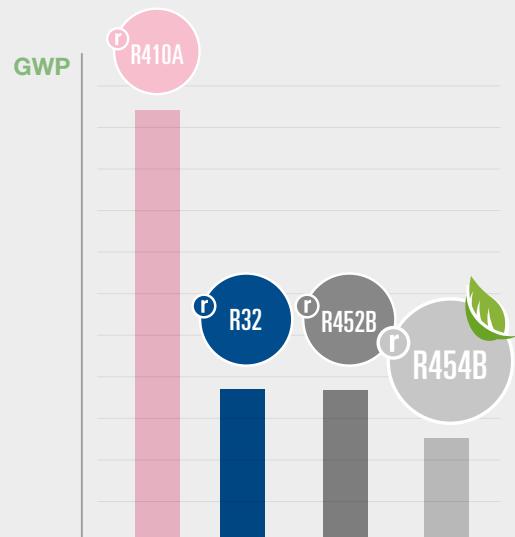

### HIGHER EFFICIENCY IN LESS SPACE

+11% COOLING CAPACITY

+16% SEASONAL EFFICIENCY



NR2-Z delivers increased cooling capacity and efficiency compared to the previous generation, exceeding the most demanding efficiency thresholds.

### SUPER SILENT OPERATION



#### THE MOST SILENT SCROLL CHILLER IN THE MARKET

NR2-G02-Z and NR2-G06-Z ranges are key in providing perfect environmental comfort.

NR Kit is available for an outstanding sound level while maintaining the same performance and footprint as the standard version.

### UNYIELDING IN EXTREME CONDITIONS

#### EXTENDED OPERATING LIMITS

Designed to ensure complete reliability, NR2-Z operates in all climates from -20°C to +52°C.

#### COOLING

#### AIR

from -20°C up to 52°C

#### WATER

from -12°C up to 20°C

NR2-Z can be equipped with highly resistant coil coatings to withstands even the harshest industrial or coastal environmental conditions.



# TECHNOLOGICAL CHOICES

## W3000+ CONTROL

**Management software developed fully in-house**

- ▶ Proprietary settings for faster adaptive responses to different dynamics
- ▶ Enhanced diagnostics thanks to the black box function
- ▶ Connectivity with the most commonly used BMS protocols and M-Net Mitsubishi Electric proprietary protocol (Opt.)

## KIPlink USER INTERFACE

**An exclusive product of Mitsubishi Electric Hydronics & IT Cooling System**

Based on Wi-Fi technology, KIPlink allows one to operate the unit directly from a mobile device (smartphone, tablet, or notebook) by simply scanning the QR code positioned on the unit.



**Patent-pending solution which optimizes the thermodynamic cycle**



**New generation full aluminum micro-channel coils for cooling only chillers**


- ▶ Long Life Alloy (LLA) for higher corrosion resistance and longer life cycle
- ▶ Up to 30% of refrigerant charge reduction vs. traditional solutions
- ▶ Lower weight vs. traditional solutions

## AI- E-coating treatment (opt.)



- ✓ Excellent resistance to UV rays.
- ✓ **over 6000 h resistance** as per ASTM B117
- ✓ **over 1000 h of surface protection** against UV rays as per ASTM G155-05a

### E-coating process

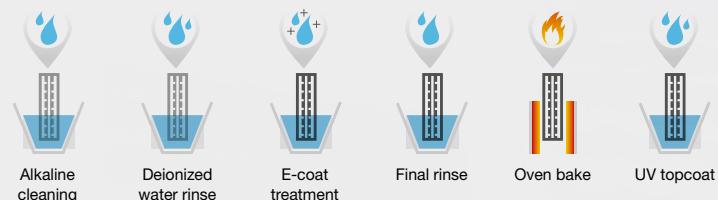

## R454B Refrigerant

**High density, low GWP refrigerant**

**GWP: 467**

**-76% vs R410A  
-31% vs R32**

- ▶ **Composition:**  
69% R32 + 31% R1234yf
- ▶ **Global Warming Potential:**  
467 (IPCC AR5)

- ▶ **Safety classification:**
  - A2L mildly flammable (ISO 817)
  - Fluid Group 1 (PED)

## BEST-IN-CLASS TECHNOLOGICAL CHOICES FOR HIGH-LEVEL PERFORMANCE AND SUPER SILENT OPERATION

### FANS

#### High performing, axial fans:

- ▶ External bell mouth for the highest efficiency and best-in-class sound power levels
- ▶ Variable Speed control as standard (DVVF), for large operating limits

#### UP TO +9% MORE SEASONAL EFFICIENCY



#### EC fans (opt. available for all versions)

- ▶ Continuous regulation of air flow
- ▶ Reduced power consumption and increased efficiencies at partial loads
- ▶ High ESP EC fan option for up to 150 Pa of available static pressure



### SCROLL COMPRESSORS



New generation scroll compressors, developed for the use of high density A2L refrigerants (Fluid Group 1 of PED Directive).

### Heat Exchangers

NR2-Z range is available with either Shell & Tube or Plates heat exchangers:

#### Plates Evaporator from 167 kW to 367 kW

- ▶ Made of AISI 316 steel plates, copper-brazed, **fully protected against ice formation** with closed-cell neoprene external lining

#### Shell & Tubes Evaporator from 167 to 921 kW

- ▶ Dry expansion, single pass, **fully in-house developed**, with internally grooved copper tubes and **possibility of inspection and tubes cleaning**



### HYDRONIC MODULES

The **fully integrated hydronic module** (opt.) includes the pumps, the buffer tank, and all the main hydraulic components, **which optimize of the installation space, time, and costs.**

#### Pumps

- ▶ In-line configuration
- ▶ 2-pole motor
- ▶ Single or twin pumps
- ▶ Low or high head (approx. 100 or 200 kPa).

#### Pumps + Inverter

- ▶ External inverter to adjust the waterflow
- ▶ Reduced energy consumption through speed regulation
- ▶ Available flow control logics: Constant flow parameter-set, variable flow with VPF and VPF.D systems

#### Pumps + Buffer tank

- ▶ Up to 1000 liter buffer tank
- ▶ 20mm insulation lining
- ▶ Including: expansion vessel, safety valve, manometer.



# EQUIPMENT FOR MISSION CRITICAL APPLICATIONS

## FAST RESTART

Ensures a **faster return to the necessary cooling** levels in the shortest time possible, while maintaining the **reliability** of the chiller.




Ensure immediate cooling start-up within 22"



Have the unit running at full load in a shorter time

For instance, 4 compressors units in standard working conditions delivers 100% of cooling capacity within 52" after power is restored.

## DOUBLE POWER SUPPLY

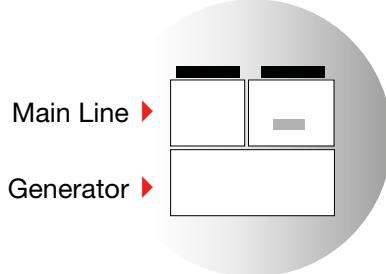

Redundancy increases uptime. NR2-G02-Z and NR2-G06-Z extends this concept also to the electrical supply: the unit, equipped with an ATS\*, can be connected to two separate power lines to enhance the system's dependability.

In case of a main line power outage, the ATS\* automatically switches over to the backup line, granting uninterrupted power supply to the unit. The double power supply makes NR2-Z chillers suitable for Uptime Institute's TIER III and TIER IV\*\* design topologies, the highest standards of reliability.

\* ATS: Automatic Transfer Switch

\*\* The Tier Classification System provides the data center industry with a consistent method to compare typically unique facilities based on expected site infrastructure performance, or uptime.

## MULTI MANAGER


## SMART LAN FUNCTIONS

The NR2-Z ranges feature embedded LAN logics for an easy connection between a group of chillers.

- ▶ Up to 8 chillers connected to the same group.
- ▶ Load sharing and Sequencing.  
Logics for the smart distribution of cooling loads among the units.
- ▶ Selectable units' start-up sequence and group Fast Restart (with Fast Restart option).  
To avoid simultaneous start-ups of different unit's compressors in case of dangerous current peaks.
- ▶ Stand by unit management with automatic unit rotation.
- ▶ Dynamic master with succession priority.  
One master unit is elected to coordinate the group and if it becomes disconnected the candidate unit takes full control.
- ▶ Resource priority management.  
For a group of chillers, with different technologies, it is possible to set the usage priority of each unit, making the most of the available cooling resources.

The entire cooling equipment works as one, with one master chiller that coordinates and optimizes the operation of the group.

## MASTER SUCCESSION PRIORITY

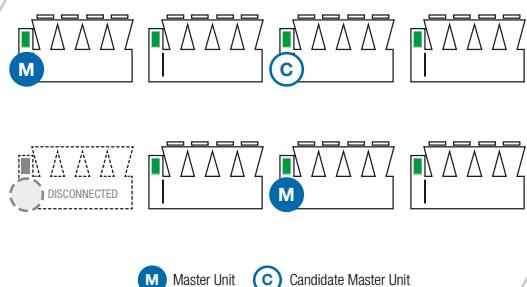

## FURTHER OPTIONS

### Set-point adjustment

**4-20 mA:** Enables remote set-point adjustments (analog input).  
**Double set-point:** Enables the remote switch between 2 set-points (digital input).  
**Set-point compensation:** Automatic adjustment of the set-point on the basis of the outdoor temperature.

### Control functions

**Night mode:** Limits the unit sound level reducing the usage of the resources. Sound power reduction (with factory settings): -3 dB(A).  
**U.L.C. User Limit Control:** Controls a mixing valve (not included) to ensure a safe start-up and operation of the unit even in critical conditions.  
**Remote probe:** Controls the unit's and pump's activation on the base of the water temperature of the buffer tank or hydraulic decoupler.  
**Demand limit:** Limits the unit's power absorption for safety reasons or in temporary situations (digital input).

### Electrical

**Compressor rephasing:** The capacitors on the compressors' line increase the unit's power factor.  
**Soft-starter:** Manages the inrush current enabling lower motor windings' mechanical wear, avoidance of mains voltage fluctuations during starting and favorable sizing for the electrical system.

### Connectivity

Serial card interface module to allow integration with BMS protocols:  
**Modbus / LonWorks / BACnet MS/TP / BACnet over IP / Konnex / Modbus TCP/IP/ SNMP**  
**M-Net interface kit:** Interface module to allow the integration of the unit with Mitsubishi Electric proprietary communication protocol M-Net.  
**Multi Manager** options to allow easy connection between a group of chillers

### Energy Meter

**Energy meter for BMS:** Acquires electrical data and the power absorbed by the unit and sends them to the BMS for energy metering (Modbus RS485).  
**Energy meter for W3000:** The electrical data acquired is available directly on the unit's control.

### Refrigerant circuit

**Compressor suction and discharge valves:** Installed for each compressor tandem or trio, the valves simplify maintenance activities. The user can work on the isolated valve for periodic maintenance or replacement, without removing the refrigerant from the circuit.  
**Dual pressure relief valves with switch:** One valve is isolated from the refrigerant circuit while the other is in service. The user can work on the isolated valve for periodic maintenance or replacement, without removing the refrigerant from the circuit.

### Refrigerant leak detector

**Leak detector:** Factory installed device. In case of a gas leak detection it raises an alarm.  
**Leak detector + compressor off:** Factory installed device. In case of a gas leak detection it raises an alarm and stops the units.

### Hydraulic

**Water flow switch:** Designed to protect the unit when the water flow across the evaporator is not sufficient and falls outside of the operating parameters.

### Structure

**Anti-intrusion grilles:** Perimeter metal grilles to protect against the intrusion of solid bodies into the unit structure.  
**Spring or rubber type anti-vibration mountings:** Reduce vibrations, keeping noise transmission to a minimum.

### Packing

**Standard or nylon packing:** The unit is provided with plastic supports, with or without a protective nylon layer.  
**Container slides or packing:** The unit is provided with metal slides to load it in a container, with or without a protective nylon layer.  
**Wooden cage packing:** The unit is provided with a robust wooden cage, with or without a protective nylon layer.



















# “BY FAR THE BEST PROOF IS EXPERIENCE”

**Sir Francis Bacon**  
British Philosopher (1561 - 1626)

## TECNOPOLO BOLOGNA

2018-2019 Bologna – Italy

**Application:**

Residential buildings,  
Data Center, Offices  
Mixed-Use Development

**Cooling capacity:**

6490 kW

**Installed units:**

2x NECS-WQ 0904,  
2x NX-WN 0252,  
1x WIZARD 1720,  
2x WIZARD 2080, 3x ClimaPRO,  
9x i-FR-G05-Z/E/S 3602,  
28x w-NEXT2 K E8 U 180

**Plant type:**

Hydronic System, HPAC  
System, Air to Air System

**Heating capacity:**

566 kW

**Air flow:**

13005 m<sup>3</sup>/h



### PROJECT

The real estate complex of the former tobacco factory, owned by the Emilia-Romagna Region, will become the headquarters of the new Tecnopolo in Bologna: a center for innovation and experimentation. It will host various institutions and the data center for the European Centre for Medium-range Weather Forecasts, setting up itself as a European climate change research hub.

### CHALLENGE

The comfort in the ECMWF offices and the cooling of the ECMWF data center are managed by a single joint HVAC system, designed to ensure maximum efficiency with reduced environmental impact.

### SOLUTION

The HVAC system consists of: 28 w-NEXT 2 K 180, RC branded hydronic close control units for the server rooms, 2 NR-W-Z/N 0262 heat pumps, 2 NECS-W/Q 0904 multipurpose heat pumps, 3 WZ-E air handling units, all of which are Climaveneta branded, for year-round conditioning of the offices, and 9 RC branded i-FR-G05-Z/E/S 3602 screw inverter air source chillers, dedicated to cooling the data center.

# IKCO DATA CENTER


2017-2018 Tehran – Iran

**Application:**  
Data Center

**Cooling capacity:**  
1280 kW

**Plant type:**  
Hydronic System

**Macchine installate:**  
1x high efficiency scroll compressor chiller, 4x screw compressor chillers

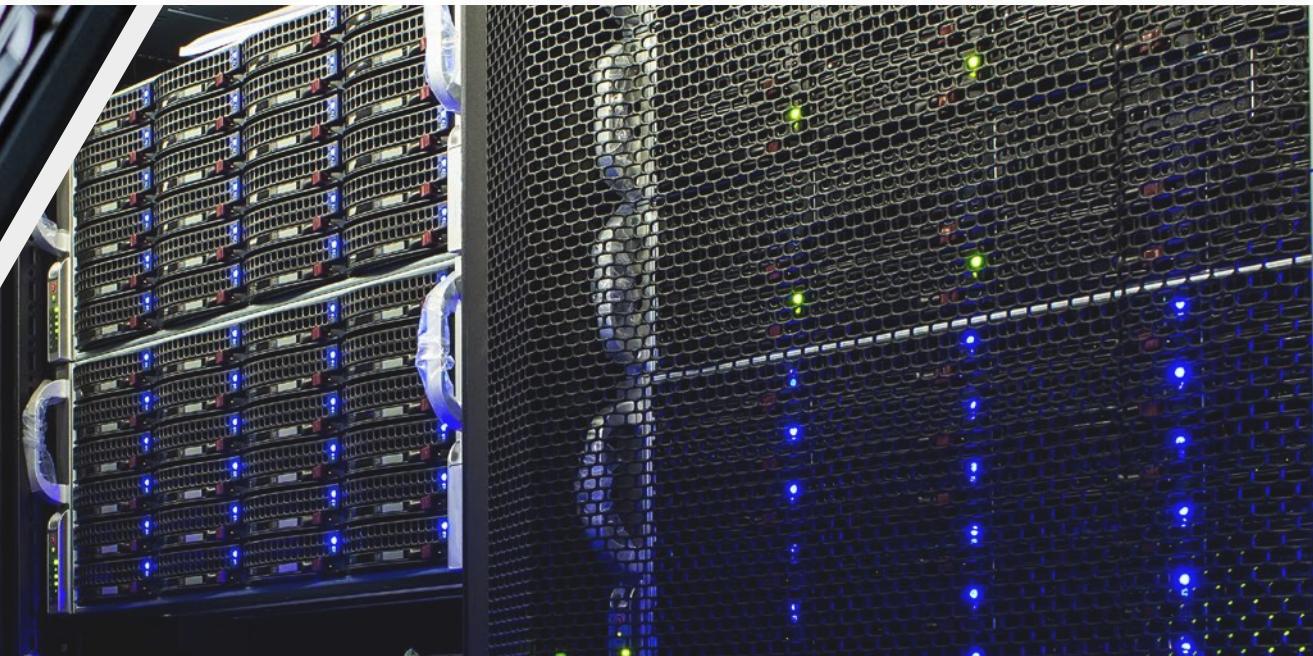

2016-2018 Wysogotowo - Poland  
**Inea Data Centre**

**Application:** Data Center  
**Plant type:** Hydronic System  
**Cooling capacity:** 1350 kW  
**Installed machines:**  
 3x double section close control units,  
 3x full inverter close control units,  
 3x free cooling chillers,  
 3x remote condensers



# MORE THAN 1000 PROJECTS ALL OVER THE WORLD

2019 Sydney - Australia

## CDC Eastern Creek

**Application:** Data Center

**Plant type:** Hydronic System

**Cooling capacity:** 16751 kW

**Installed machines:**

12x high efficiency scroll compressor chillers,

6x screw compressor chillers



2015 Aubervilliers - France

## Telecity


**Application:** Data Center

**Plant type:** Hydronic System

**Cooling capacity:** 208 kW

**Installed machines:**

2x scroll compressor chillers

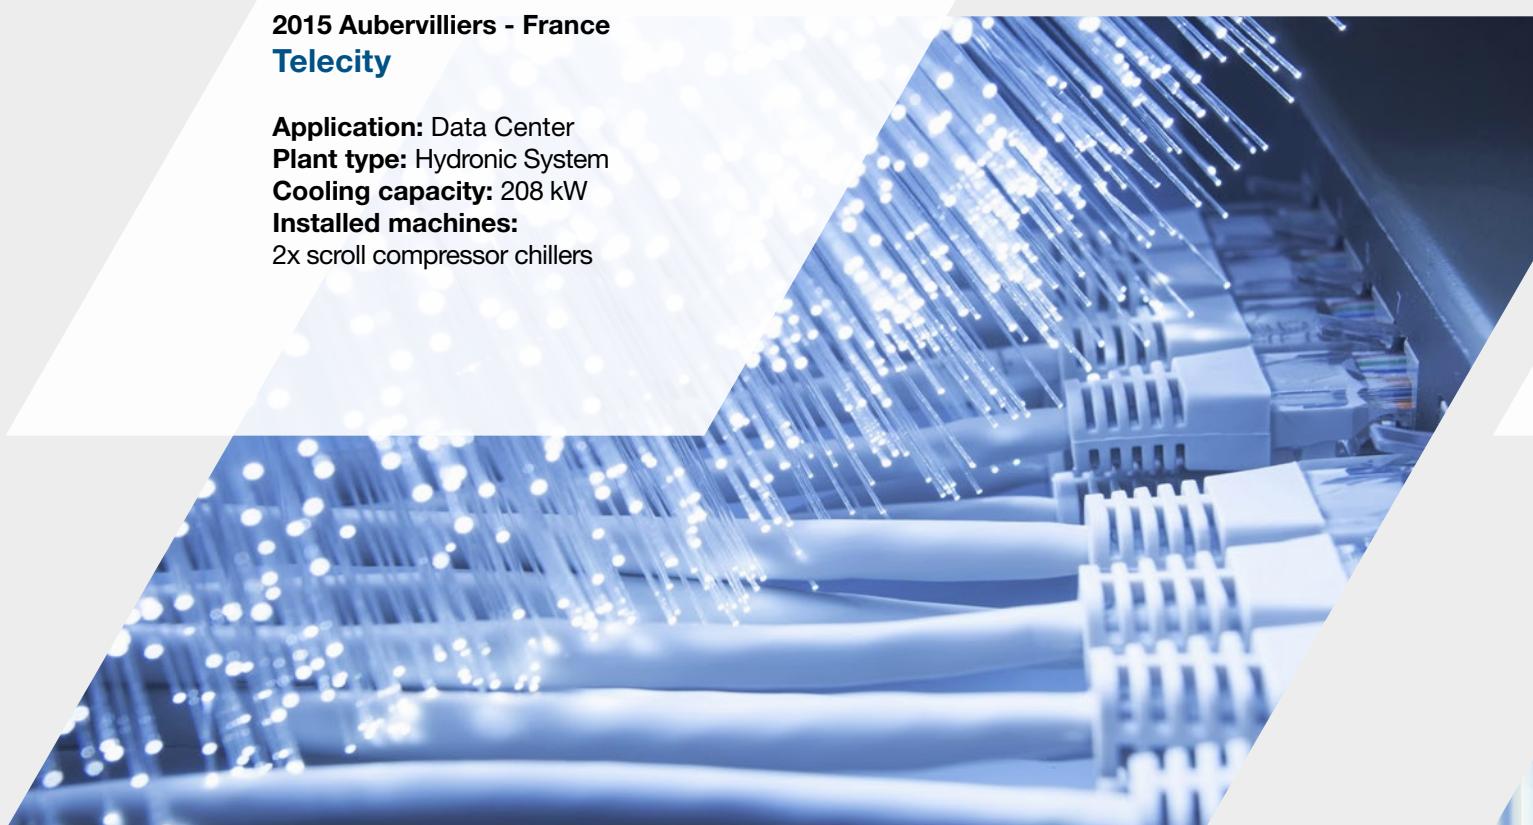

**Every project is characterised by different needs and system specifications for various climates. All these projects share high energy efficiency, maximum integration, and total reliability resulting from the RC brand experience.**

#### 2010 Södertälje - Sweden

#### SCANIA


**Application:** Data Center

**Plant type:** Hydronic System

**Cooling capacity:** 927 kW

**Installed machines:**

1x screw compressor chiller  
with free cooling technology,  
2x scroll compressor chillers

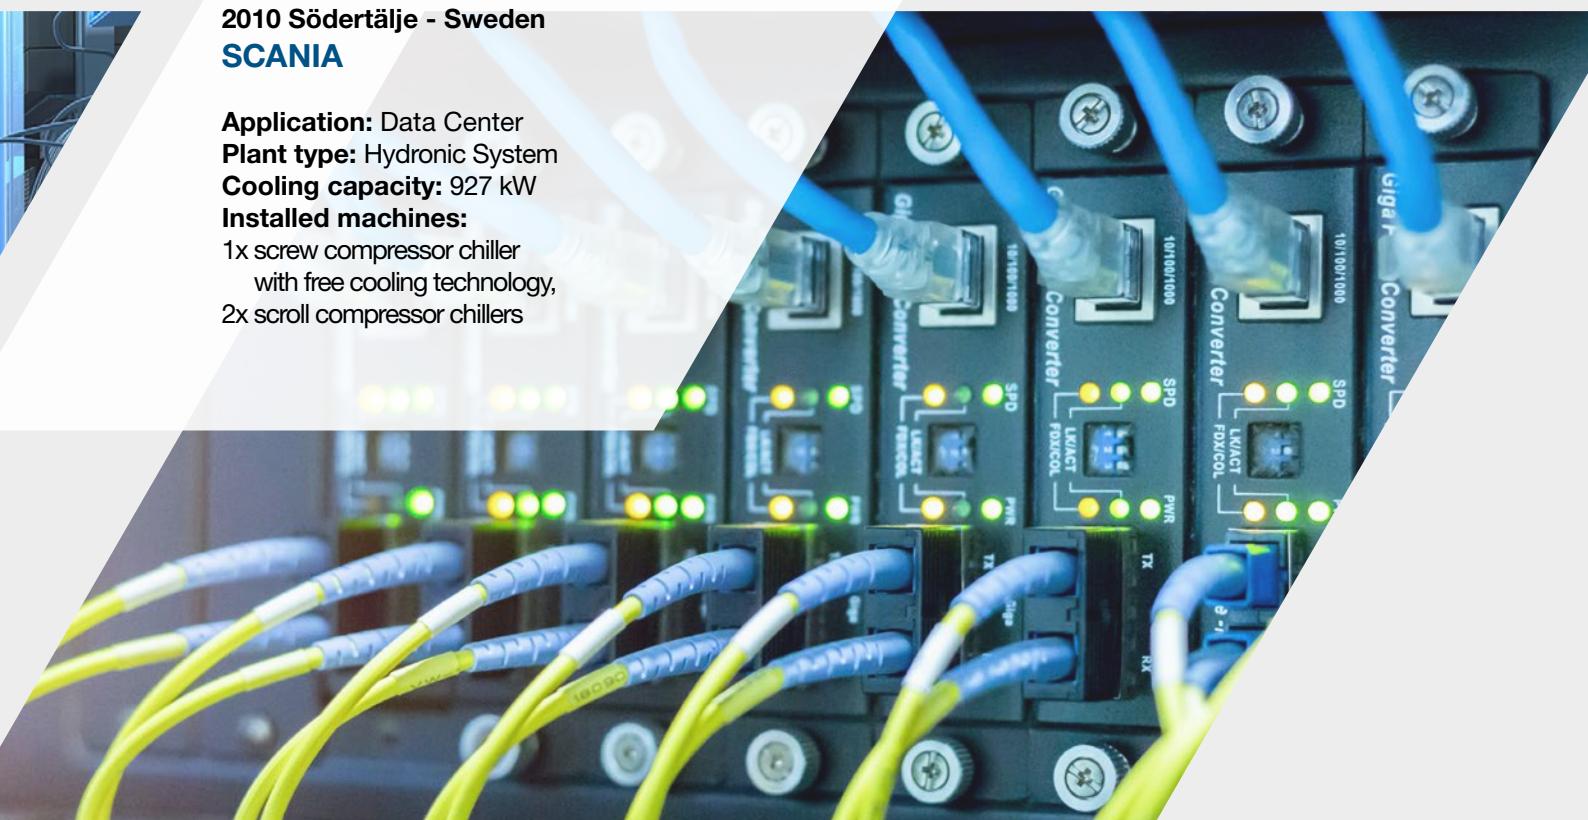

#### 2016-2018 Treviso – Italy

#### Asco TLC Data Centre / Tier III

**Application:** Data Center

**Plant type:** HPAC System

**Cooling capacity:** 861 kW

**Installed machines:**

6x double section close control units,  
2x free cooling chillers in super silent version





for a greener tomorrow



Eco Changes is the Mitsubishi Electric Group's environmental statement, and expresses the Group's stance on environmental management. Through a wide range of businesses, we are helping contribute to the realization of a sustainable society.

## MITSUBISHI ELECTRIC HYDRONICS & IT COOLING SYSTEMS S.p.A.

Head Office: Via Roma 5 - 27010 Valle Salimbene (PV) - Italy  
Tel +39 (0) 382 433 811 - Fax +39 (0) 382 587 148

[www.rcitcooling.com](http://www.rcitcooling.com)  
[www.melcohit.com](http://www.melcohit.com)

